Global Advanced Research Journal of Agricultural Science (ISSN: 2315-5094) Vol. 3(2) pp. 063-066, February, 2014. Available online http://garj.org/garjas/index.htm Copyright © 2014 Global Advanced Research Journals

Full Length Research Paper

Assessment of saponification as a simple method for the preparation of glycerol

Stephen Shaibu Ochigbo

Department of Chemistry, School of Natural and Applied Science, Federal University of Technology, Minna, Nigeria Email: stephen_ochigbo@yahoo.com; stephenochigbo@futminna.edu.ng; Tel: +234 (0)8132286172

Accepted 14 November, 2013

Gycerol is very important industrially as it is used in the manufacturing of a wide array of commercially useful products such as confectionery, beverages, soaps and cosmetics, paints, lubricants, dynamite, etc. In this work, alkali-hydrolysis of groundnut oil (saponification) was employed to prepare glycerol which was then subsequently characterized. The results obtained show that the parameters of the glycerol compare favourably with pure glycerol in the literature. The method is recommended because it is simple, cheap and gives rise to product that can easily be separated out clean.

Keywords: Alkali-catalysed hydrolysis; Glycerol; Groundnut oil; Saponification.

INTRODUCTION

Glycerol is a clear, water-white, viscous, hygroscopic liquid with sweet taste at ordinary temperature. The term 'glycerine' normally used interchangeably with glycerol actually refers to the purified commercial product containing about 95 percent glycerol. Pure glycerol has so many important uses, which include applications such as in food products (to sucrage liqueurs), cosmetics (as moisturizing factor), textile industry, in pharmaceuticals, cellulosic industries. Other uses are in the preparation of nitrocellulose, as supplement in fodder for pigs, swine, and hogs, antifreeze in automobile radiators and lubricant in watches, among others (Pagliaro *et al.*, 2007; Wang *et al.*, 2001). Still, research is ongoing aimed at extending its uses and new derivatives (Johnson & Taconi, 2007; Behr *et al.*, 2008; Pagliaro & Rossi, 2008).

There are several ways for preparation of glycerol. Glycerol could be prepared on a large scale synthetically from propylene, a by-product of crude oil refining. Since this synthetic method relies on crude oil, which is a finite

and non-renewable resource, the method is losing popularity. Moreover, the petrochemical processes for obtaining the propylene from crude oil are tedious. expensive and fraught with myriad of pollution problems. Glycerol is also produced by microbial fermentation of lipids (Wang et al., 2001) but the process, apart from being slow, leads to yield that is quite small to meet with industrial demands. Glycerol is further obtained as a major by-product in the manufacture of biodiesel from fatty oils. This is usually termed raw or crude glycerol. Presently, the most often used biodiesel fuels are vegetable oil fatty acid methyl or ethyl esters produced by transesterification (Andre et al., 2010; Sendzikiene et al., 2007). For every three mol of ethyl esters, one mol of crude glycerol is produced, which is equivalent to approximately 10 wt. % of the total biodiesel production (Karinen and Krause, 2006; Pagliaro et al., 2009; Rahmat et al., 2010). However, glycerol produced through the biodiesel process is strictly limited because of presence of pollutant substances which

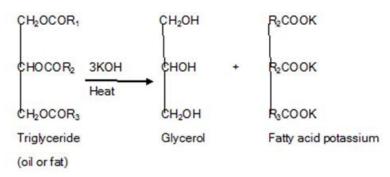


Figure 1. Potassium hydroxide catalyzed hydrolysis of oil

include spent catalysts, residual methanol, mineral salts, heavy metals, mono- and diacylglycerols, free fatty acids and soaps (Dasari, 2007). Efforts by biodiesel producers to purify this raw glycerol have involved complex installations, making use of processes of filteration, chemical steps, and vacuum distillation. Unfortunately, such installations are too expensive for small and medium production plants. They are, thus, out of reach of an investor with a small capital.

Due to its expanding applications, it is hoped that the demand for alveerol will continue to be on the increase. which makes the need to explore a simple, less costly, easily manageable and straight forward method for production of glycerol compelling. In this regards, the use of alkali catalysed hydrolysis of fats or oils (Figure 1), simply referred to as saponification, as a method of production of glycerol presents a win-win situation. The advantages of this method are two-fold: Firstly, the reactions are one-way rather than reversible. Secondly, the products are easier to separate. For example, the soap produced in this process can be easily salted out and separated from the lye (glycerol/water mixture). In this paper, the production of glycerol by saponification of groundnut oil is reported. Groundnut oil is easy to extract from the seeds and the plant which provides the source is cultivated in large quantities commercially in Nigeria.

MATERIALS AND METHODS

Materials: Crude groundnut oil used was purchased from a local market in Minna, Niger State, Nigeria. Analytical grade potassium hydroxide (KOH) was used for the saponification process.

Degumming of the crude oil: The essence of the degumming is to remove natural gums and phosphatides

present in the oil. If left in the oil, gums give rise to substantial oil losses during alkali refining (Ibemesi, 1992). It was done by measuring some quantity (100 cm³) of groundnut oil into a 500 cm³ capacity separating funnel containing concentrated phosphoric acid (0.2 cm³). After a swirling, the mixture was then washed with hot water several times. The gums and water separated out at the bottom of the separating funnel and is removed. The process of washing with hot water was continued until all the gums were removed and the effluent water tasted neutral to litmus as indication of absence of phosphoric acid.

Characterization of the oil: The degummed oil was characterized based on IUPAC standard methods to determine the following properties: density, refractive index, acid number, and saponification value, respectively.

Preparation and characterization of glycerol: Preparation of glycerol was carried out from alkalihydrolysis of oil as described by Unilever (1964). The product was analysed to determine its yield, density, refractive index and boiling point.

RESULTS AND DISCUSSION

Table 1 presents the basic characteristics of the groundnut oil. The low-acid value of the oil indicates the low-level content of free fatty acids. The amount of free fatty acids generated in any vegetable oil usually depends on the extent of deterioration of the oil. Thus, free fatty acids content is an indicator of the freshness of oil. The saponification value obtained falls within the range of values (188-195) reported for similar oil in the literature (Gunstone and Norris, 1983; Ihekoronye and Ngoddy, 1985; Asiedu, 1989). The density value suggests characteristically that groundnut oil, like other fatty oils in

Table 1. Characteristics of the oil

| Parameters | Values |
|----------------------|----------------------------------|
| Acid number | 0.56 mgKOH/g oil |
| Saponification value | 189.34 cm ³ KOH/g oil |
| Density, 25°C | 0.91 g/cm ³ |
| Refractive index | 1.47 |

Table 2. Properties of the glycerol

| Properties | Values |
|----------------------------|---------------|
| Density/gcm ⁻³ | 1.2969 |
| Refractive index | 1.45 |
| Boiling point | 260°C |
| Yield of glycerol/100g oil | 34.88 % (v/v) |

general, is less dense than water (density, ca. 1 g/cm³). The density can vary very easily according to temperature. For example, at 15°C, density of groundnut oil is reportedly in the range 0.917-0.921, while at 20°C, the parameter range from 0.910-0.915 (lhekoronye and Ngoddy, 1985; Asiedu, 1989). Thus, the density varies inversely proportional with temperature. The obtained value of refractive index is also consistent with what is found in the literature (Gunstone and Norris, 1983).

Table 2 shows the properties of glycerol prepared from the saponification process. The density of pure glycerol commonly reported in literature is around 1.261, which is near to the determined value. Similarly, the refractive index (1.4500) of the glycerol is close to the literature value (1.4746). Only in the boiling point, that a significant difference is observed between what was determined (260°C) and value (290 °C) in the literature (Lide, 1994). A number of factors might be attributed to this. They include differences in methods of determination, processing techniques employed in the preparation of the glycerol, age of the oil from which the glycerol is produced, to mention but a few. The yield of 34.88% of glycerol recorded is quite high and hence recommends this method as potentially viable for exploitation for production of glycerol in commercial quantity.

CONCLUSION

The saponification process provides a ready source of glycerol from vegetable oil. Glycerol produced by other

large-scale sources is fraught with pollutants which cannot be removed except with use of expensive installation equipments. Although the latter methods result in glycerol glut, the cost implications for purification make the procedures unattractive. This impels the need to consider the saponification method for improved efficacy in production of glycerol.

REFERENCES

A Unilever Laboratory Experiment 1 (1964). The Preparation of Soap, Information Department, Unilever Education Section, London, 1964.

André A, Diamantopoulou P, Philippoussis A, Sarris D, Komaitis M, Papanikolaou S (2010). Biotechnological Conversions of Biodiesel Derived Waste Glycerol into Added-value Compounds by Higher Production of Biomass, Single Cell Oil and Oxalic Acid. *Industrial Crops and Products* 31, 407-417, ISSN 0926-6690.

Asiedu JJ (1989). Processing tropical crops: a technological approach. 1st edition, Macmillan Press Limited, London, p. 137.

Behr A, Eilting J, Irawadi K, Leschinski J, Lindner F (2008). Green Chem. 10, 13.

Dasari M (2007). Crude glycerol potential described. *Feedstuffs* 79, No. 43, October 15.

Gunstone FO, Norris FA (1983). Lipids in food, chemistry, biochemistry and technology, 1st edition, Pergamon Press, Oxford.

Ibemesi JA (1992). Vegetable Öils as Industrial Raw Materials. The Nigerian Perspective. (A Monograph). SNAAP Press, Enugu.

Ihekoronye AI, Ngoddy PO (1985). Integrated Food Science and Technology for the Tropics, 1st edition, Macmillan Press, London. p. 195.

IUPAC Standard Methods for Analysis of Oils, Fats and Derivatives, 6th Edition, Pergamon Press, Oxford p. 56

Johnson DT, Taconi KA (2007). The glycerine glut: options for the valueadded conversion of crude glycerol resulting from biodiesel production. *Environmental Progress* 26 (4), 338-348, ISSN 1547-5921

- Karinen RS, Krause AOI (2006). Newbiocomponents from glycerol. Applied Catalysis A: General 306, 128-133, ISSN 0926-860X
- Lide DR (ed) (1994). CRC Handbook of Data on Organic Compounds 3rd ed., Boca Raton, FL: CRC Press, p. 4386.
- Pagliaro M, Ciriminna R, Kimura H, Rossi M, Pina CD (2007). From glycerol to value-added products. *Angewandte Chemie International Edition*, 46, 434-440, ISSN 1521-3773
- Pagliaro M, Ciriminna R, Kimura H, Rossi M, Pina CD (2009). Recent advances in the conversion of bioglycerol into value-added products. *Europ. J. Lipid Sci. Technol.* III, 788-799, ISSN 1438-9312
- Pagliaro M, Rossi M (2008). The Future of Glycerol, RSC Publishing, Cambridge, 2008
- Rahmat N, Abdullah AZ, Mohammed AR (2010). Recent progress on innovative and potential technologies for glycerol transformation into fuel additives: a critical review. Renewable and Suitable Energy Reviews 14, 987-1000, ISSN 1364-0321
- Sendzikiene E, Makareviciene V, Janulis P (2007). Oxidation Stability of Biodiesel Fuel Produced from Fatty Wastes. *Polish Journal of Environmental Studies*. 16 (1) 17-22, ISSN 1230-1485.
- Wang ZX, Zhue J, Fang H, Prior BA (2001). Glycerol production by microbial fermentation: a review. *Biotechnology Advances*. 19, 201-223, ISSN 0734-9750